

TECHNICAL DATA SHEET FOR G32D5 ON THE SK32 STAND

Full Size Digital / Gas Convection Oven on a Stainless Steel Stand

STANDARD FEATURES

- 5 full size sheet pan capacity
- 3 1/8" / 85mm tray spacing
- Compact 28 7/8" / 735mm width
- 110-120V plug-in
- 15A NEMA 5-15P cordset fitted
- Digital display Time and Temperature Controls
- Large easy view 3/4" / 20mm high displays
- Electronic thermostat control
- Electronic burner ignition and safety control system
- Electronic timer with countdown or time count modes
- Programmable for up to 20 programs
- Water Injection mode
- Bi-directional fan motor
- 33,000 Btu/hr patented Infrared burner system
- Safe-Touch vented side hinged door (standard LH hinge). Optional RH hinge (field convertible)
- Stay-Cool door handle
- Porcelain enameled oven chamber
- Plug-in continuous oven door seal
- Dual halogen oven lamps
- Anti-skid 2" / 50mm dia. 4" / 102mm high adjustable stainless steel feet
- 5 oven wire racks supplied
- 100% recyclable packaging

ACCESSORIES

- Turbofan SK32 Oven Stand



G32D5

Unit shall be a Moffat gas heated Turbofan convection oven NSF-4 and CSA listed. The oven shall have a one piece porcelain enameled oven chamber, stainless top and sides and safe touch vented easy clean side hinged door that offers field reversible hinging. Oven shall have capacity for five full size sheet pans. The oven shall be controlled by an electronic control having separate digital displays and adjusting knobs for time and temperature functions. The oven control shall allow both manual and programmed operating modes and have separate control keys for water injection, oven light function and timer operation. The unit shall include dual halogen oven lamps. Oven shall be able to be bench mounted on 3" / 76mm feet or mounted on oven stand model SK32. Unit shall be supplied in 100% recyclable shipping packaging.

SK32

Unit shall be a Moffat Turbofan stainless steel oven stand NSF-4 listed. The stand shall be constructed from stainless steel tube with castors, with front castors having dual swivel and wheel locks. It shall be fitted with 6 tray runners suitable for up to 12 half size sheet pans or 6 full size sheet pans. The stand shall be fully compatible with, and support, Turbofan Convection Oven models E32D and G32D. Unit shall be supplied in 100% recyclable shipping packaging.

G32D5 Full Size Digital / Gas Convection Oven on a Stainless Steel Stand

CONSTRUCTION

Porcelain enameled fully welded oven chamber
 Stainless steel front, sides and top exterior
 Stainless steel oven fan baffle and oven vent
 Removable 5 position stainless steel side racks
 Oven racks chrome plated wire (5 supplied)
 Stainless steel frame side hinged door
 0.2" / 5mm thick door outer glass
 0.2" / 5mm thick low energy loss door inner glass
 Full stainless steel welded door handle
 Stainless steel control panel
 Aluminized coated steel base and rear panels

CONTROLS

Electronic controls with Digital Time and Temperature display,
 Manual or Program modes
 Large 3/4" / 20mm high LED displays
 Two individual time and temperature setting control knobs
 6 function keys
 ON/OFF key
 Oven Lamp key (toggle or auto-time off mode settings)
 Timer Start/Stop key
 Water Injection key (manual shot or timed shot mode settings)
 Programs select key
 Actual temperature display key
 Adjustable buzzer/alarm volume
 Thermostat range 150-550°F / 50-260°C
 Timer range from 180 minutes in countdown mode
 Timer range up to 999 minutes in time count mode for holding,
 slow cooking
 Direct burner ignition control flame failure safety control
 Over-temperature safety cut-out

CLEANING

Stainless steel top and side exterior panels
 Porcelain enameled oven chamber
 Fully removable stainless steel oven side racks
 Removable stainless steel oven fan baffle
 Easy clean door system with hinge out door inner glass (no
 tools required)
 Removable plug-in oven door seal (no tools required)
 3" / 76mm high stainless steel feet for easy access underside

SPECIFICATIONS

Electrical Requirements
 110-120V, 60Hz, 1-phase, 1A
 NEMA 5-15P cordset fitted



Gas Requirements
 33,000 Btu/hr / 35MJ/hr burner rating
 Natural, Propane/Butane models
 Unit supplied complete with gas type conversion kit

Gas Connection
 1/2" NPT male

Water Requirements (optional)
 Cold water connection 3/4" GHT male
 80psi maximum inlet pressure / 20psi minimum inlet pressure

External Dimensions

Width 28 7/8" / 735mm
 Height 35 7/8" / 910mm including 4" / 102mm feet
 Depth 31 7/8" / 810mm

Oven Internal Dimensions

Width 18 1/4" / 465mm
 Height 20 1/4" / 515mm
 Depth 27 1/2" / 700mm
 Volume 6ft³ / 0.17m³

Oven Rack Dimensions

Width 18" / 460mm
 Depth 26" / 660mm

Nett Weight (G32D5)

250lbs / 113kg

Packing Data (G32D5)

289lbs / 131kg
 25ft³ / 0.71m³
 Width 29 7/8" / 760mm
 Height 39 3/4" / 1010mm
 Depth 36 3/8" / 925mm

SK32 Stainless Steel Stand

All stainless steel welded frame oven stand for Turbofan E32D
 and G32D Series ovens
 6 position tray runners standard
 3" / 76mm diameter wheel swivel castors standard with 2 front
 castors with dual swivel and wheel
 Welded 1 1/2" and 1 1/4" square tube front and rear frames
 Welded rack supports/side frames
 4 dia. 3" / 76mm swivel castors with 2 front castors dual wheel
 and swivel lock
 Top frame oven supports suit Turbofan E32D and G32D Series
 oven mounting
 Supplied CKD for assembly on site

External Dimensions (SK32 Oven Stand)


Width 28 7/8" / 735mm
 Height 34 5/8" / 880mm
 Depth 25 5/8" / 650mm

Nett Weight (SK32 Oven Stand)

40lbs / 18.5kg

Packing Data (SK32 Oven Stand)

51lbs / 23kg
 3.5ft³ / 0.1m³
 Width 32 5/8" / 830mm
 Height 35 1/2" / 900mm
 Depth 6" / 152mm

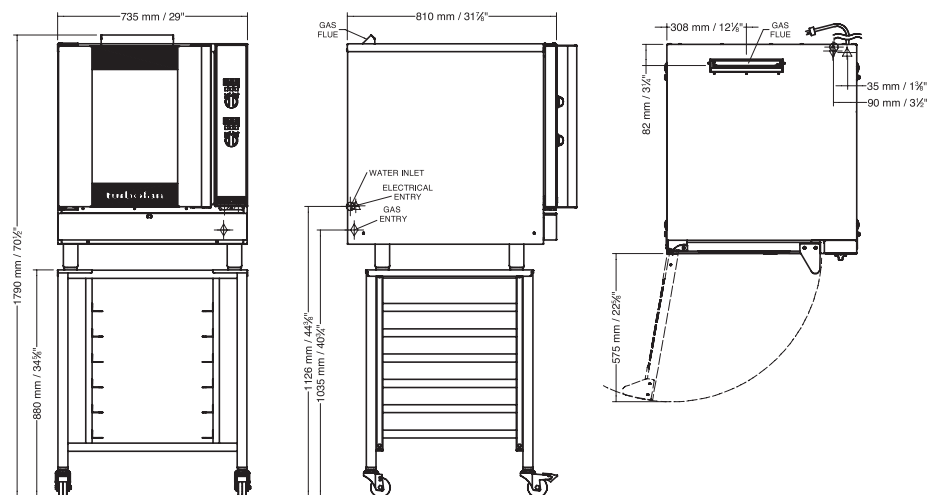

www.moffat.com

U.S.A.

Moffat Inc
 3765 Champion Boulevard
 Winston-Salem

North Carolina 27105

Ph Toll Free 1-800-551 8795

Ph 336-661 0257

Fax 336-661 9546

Email sales@moffat.com

www.moffat.com

Manufactured by:

Moffat Limited

16 Osborne Street PO Box 10-001

Christchurch 8081 New Zealand



ISO9001
 Quality
 Management
 Standard

Designed and manufactured by



ISO9001

All Turbofan products are designed and
 manufactured by Moffat using the
 internationally recognised ISO9001
 quality management system, covering
 design, manufacture and final inspection,
 ensuring consistent high quality at all times.

In line with policy to continually develop
 and improve its products, Moffat Limited
 reserves the right to change specifications
 and design without notice.

© Copyright Moffat Ltd
 Moffat 5.10

